
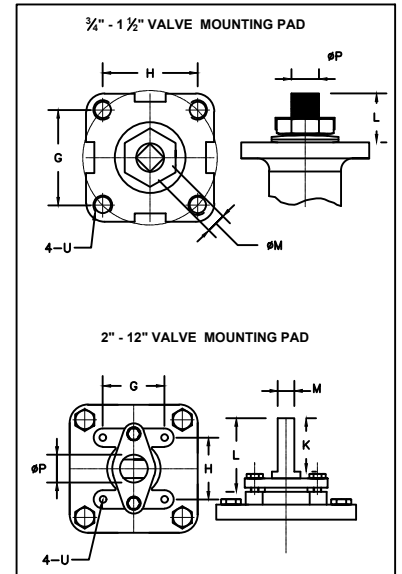


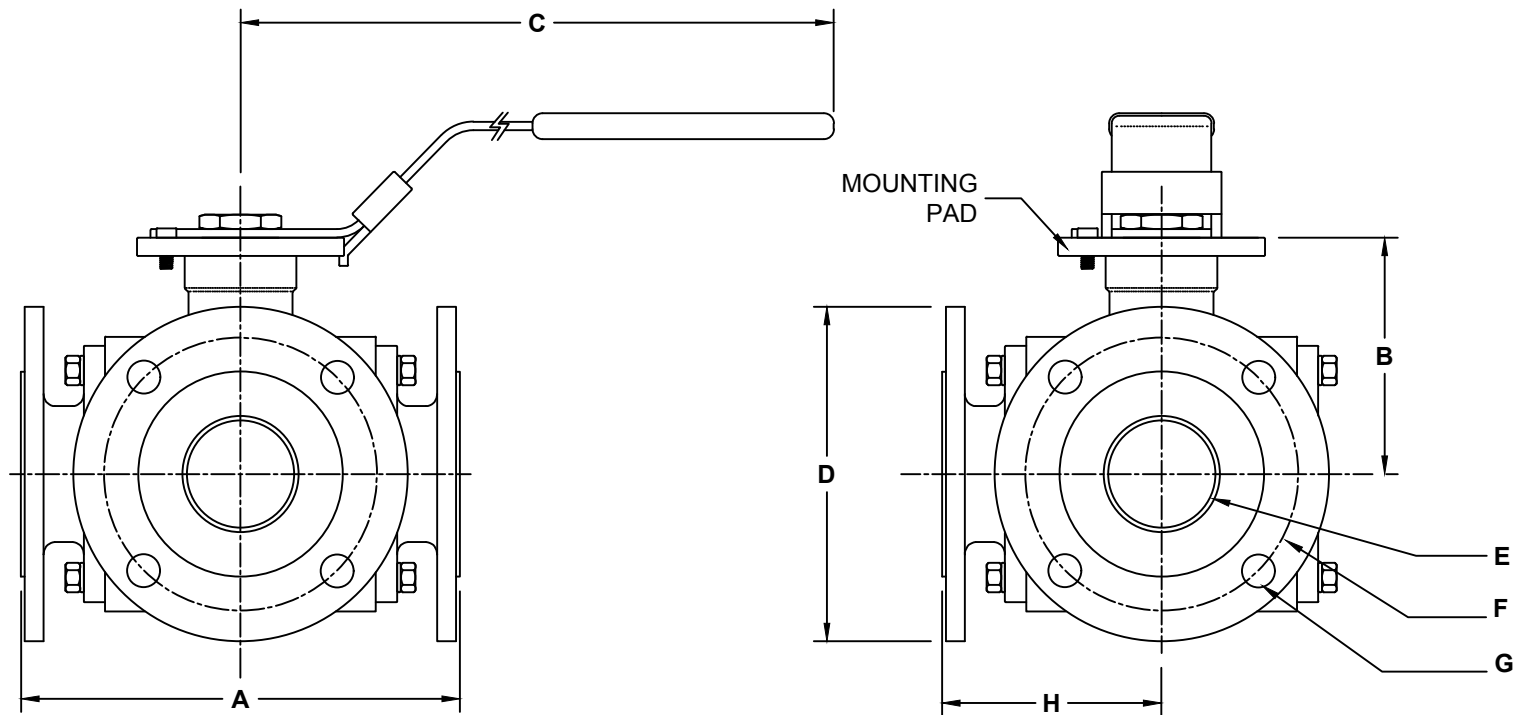

DIMENSIONAL DATA											
PART #	SIZE	A	B	C	D	E	F	G	H	Cv 90° 180°	TORQUE (in-lbs)
2FF150-6T	3/4"	6.65	2.62	7.48	3.88	0.75	2.75	0.63 x 4	3.32	16 40	250
2FF150-8T	1"	7.30	2.66	8.38	4.25	1.00	3.12	0.63 x 4	3.65	30 70	385
2FF150-12T	1 1/2"	7.17	2.48	15.00	5.00	1.50	3.88	0.63 x 4	3.58	50 230	480
2FF150-16T	2"	8.66	2.87	15.00	5.99	2.01	4.75	0.75 x 4	4.33	100 390	700
2FF150-24T	3"	11.26	3.62	15.00	7.52	3.00	6.00	0.75 x 4	5.63	240 930	1600
2FF150-32T	4"	13.66	4.88	20.00	9.01	4.02	7.50	0.75 x 8	6.83	400 1650	2800
2FF150-48T	6"	16.77	6.50	C/F	11.00	5.98	9.50	0.90 x 8	8.38	970 5000	8600
2FF150-64T	8"	20.94	7.60	C/F	13.50	7.95	11.75	0.90 x 8	10.47	1850 9000	15500
2FF150-80T	10"	27.56	9.06	C/F	16.00	9.84	14.25	1.02 x 12	13.78	3500 16000	C/F
2FF150-96T	12"	29.92	10.97	C/F	18.99	11.77	17.18	1.26 x 12	14.96	C/F C/F C/F	C/F


*2FF: S2FF = STAINLESS STEEL
C2FF= CARBON STEEL
T*: TL = L PORT
TT = T PORT

MOUNTING PAD DIMENSIONS							
SIZE	G	H	K	L	M	ØP	U
3/4"	1.95	1.95	0.47	0.49	0.354	0.46	Ø0.33
1"	1.95	1.95	0.47	0.53	0.433	0.55	Ø0.28
1 1/2"	1.95	1.95	0.63	0.73	0.551	0.61	Ø0.36
2"	1.89	2.83	1.57	1.93	0.669	0.87	5/16-18
3"	1.89	3.50	1.97	3.15	0.669	1.16	1/2-13
4"	3.50	3.50	2.44	3.15	0.906	1.34	1/2-13
6"	3.50	3.50	2.36	3.54	1.378	1.77	1/2-13
8"	4.53	4.53	2.36	3.27	1.772	2.36	5/8-11
10"	4.53	4.53	2.76	4.29	1.772	2.36	5/8-11
12"	4.53	4.53	2.76	4.33	2.165	2.76	5/8-11

MOUNTING BRACKET KIT REQUIRED TO MOUNT ACTUATOR TO ALL SIZES.
CONSULT FACTORY OR REFER TO CATALOG FOR ACTUATED ASSEMBLIES

NOTES:

- FULL PORT- ALL SIZES
- AVAILABLE IN T AND L PORT
- LIVE LOADED STEM/ANTI STATIC DEVICE
- ONE PIECE BALL/STEM TRUNNION SUPPORT
- BLOWOUT PROOF STEM
- 3 SEAT DESIGN
- VARIOUS SEAT MATERIALS AVAILABLE
- STAINLESS STEEL OR CARBON STEEL
- CONSULT FACTORY FOR 300 SERIES.

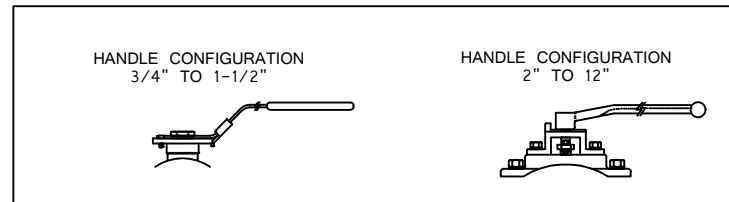

DRAWING NAME:
3-WAY STAINLESS STEEL OR CARBON STEEL
CLASS 150 FLANGE VALVE T OR L PORT

MATERIAL:	A	DRAWING NUMBER: S2FF150-C2FF150-TT-TL-SERIES	REV. 1
SCALE: N.T.S.	NAME: MCH	DATE: 8-28-17	