



BGFM SERIES BALL VALVE




Features:

- Brass Full Port Ball Valve
- 29" Hg-600psi WOG, 150 WSP
- Blow Out Proof Stem
- 0°F to 366°F Temperature Range
- NPT Standard
- Optional Nickel Plated Available, C/F
- Latch Lock Handle Available C/F

Dimensions

PART #	NPT	A	B	C	D	ØE*	Cv	Wt. Lbs.
BGFM-2	1/4"	2.30	1.65	3.86	1.97	0.39	6.3	0.31
BGFM-3	3/8"	2.32	1.65	3.86	1.97	0.39	7.0	0.31
BGFM-4	1/2"	2.81	1.81	3.86	1.97	0.59	19.0	0.51
BGFM-6	3/4"	3.13	2.28	4.80	2.54	0.79	34.4	0.79
BGFM-8	1"	3.58	2.44	4.80	2.54	0.98	50.1	1.26

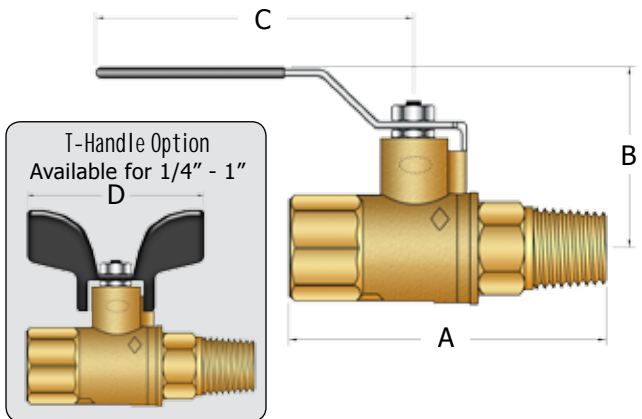

Bill of Materials

PART	Material
Body	Brass CW 617N
End Connection	
Ball	
Stem	Brass CW 614N
O-Ring	NBR
Ball Seat	PTFE
Thrust Washer/ Stem Seat	
Nut	Steel
Handle	Steel
T-Handle	Cast Aluminum

