



BV and SSBV Breather Vent

Features:

BV Series:

- Electroless Nickel Plated Steel Fitting
- 40 Micron Sintered Bronze Element
- 150 PSIG Maximum Working Pressure
- Temperature 35°F to 300°F

SSBV Series:



- 303 Stainless Steel Body
- 70 Micron Sintered 316 S.S. Element
- 150 PSIG Maximum Working Pressure
- Temperature 35°F to 392°F



BV



SSBV

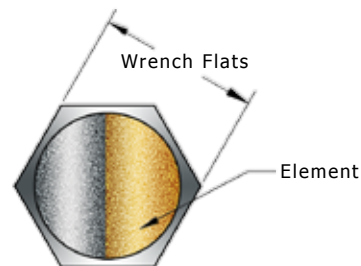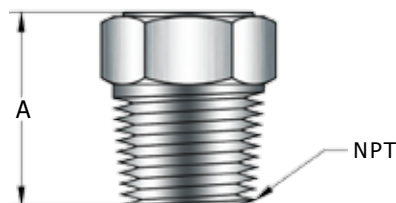

Dimensions:

Part	NPT Size	A	Wrench Flats	Body	Element
BV-1	1/8"	0.44	7/16"	Electroless Nickel Plated Steel Fitting	40 Micron Sintered Bronze
BV-2	1/4"	0.63	9/16"		
BV-3	3/8"	0.75	11/16"		
BV-4	1/2"	0.88	7/8"		
BV-6	3/4"	1.00	1-1/16"		
BV-8	1"	1.31	1-5/16"		
BV-10	1-1/4"	1.41	1-11/16"		
BV-12	1-1/2"	1.50	2"		
SSBV-1	1/8"	0.58	1/2"	303 Grade Stainless Steel	316 Stainless Steel, 70 Micron
SSBV-2	1/4"	0.78	5/8"		
SSBV-3	3/8"	0.81	3/4"		
SSBV-4	1/2"	0.96	1-5/16"		
SSBV-6	3/4"	1.05	1-1/8"		
SSBV-8	1"	1.30	1-1/2"		

Characteristics

