



PIF Series Pneumatic Filters



Features:

PIF Series:

- (PIF) Aluminum Housing, (PIFB) Brass Housing
- 40 Micron Sintered Bronze Element
- 500 PSIG Maximum Working Pressure
- Buna-N Seals 35°F to 200°F
- M=Female Inlet/Male Outlet
- Female Inlet/Female Outlet: PIF-4 & PIF-6

Options:

- Viton Seals, Suffix "V" 35°F to 400°F
- Micron Size, Suffix "20", "90"
- (Example PIF-1M90), (Kit Example EK2-90)

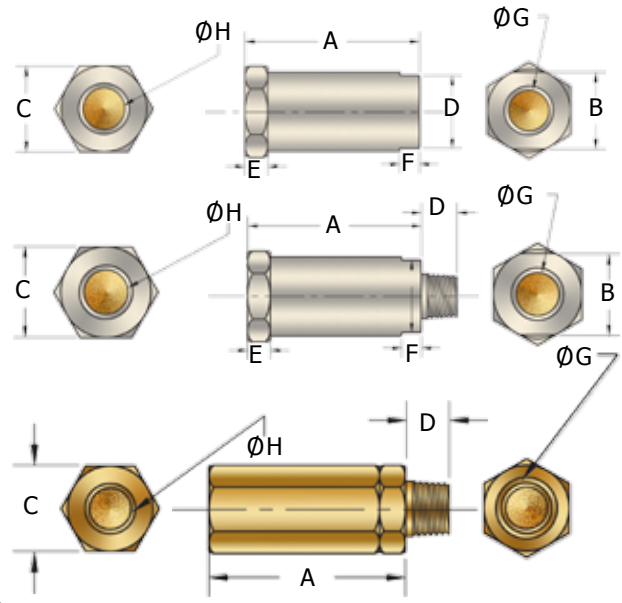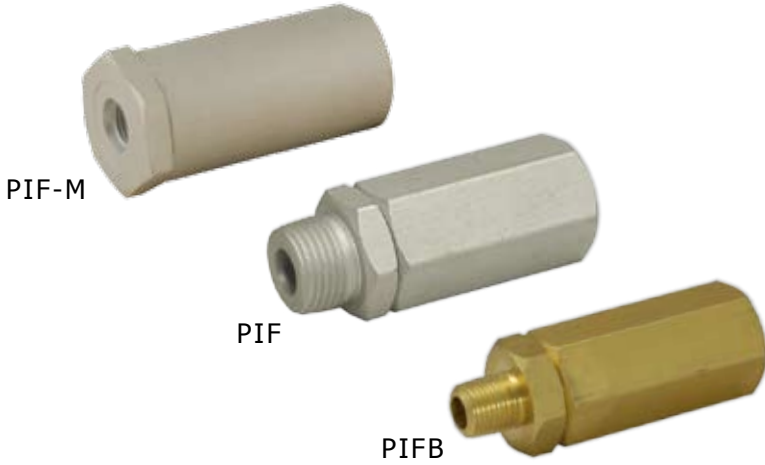

Dimensions:

Part	A	B	C	D	E	F	ØG NPT	ØH NPT	spring Kit	element Kit	Body	Element
PIFB-1M	1.88	-	0.74	0.41	-	-	1/8"	1/8"	SKP2	EKP2	Brass	40 Micron Sintered Bronze
PIF-1M	1.88	-	0.74	0.41	-	-	1/8"	1/8"	SKP2	EKP2	2011-T3 Aluminum	
PIF-2M	2.29	-	0.74	0.41	-	-	1/4"	1/4"	SKP2	EKP2		
PIF-3M	1.87	-	0.86	0.44	-	-	3/8"	3/8"	SKP2	EKP2		
PIF-4	3.30	1.38	1.50	1.38	0.43	0.37	1/2"	1/2"	SKP4	EKP4		
PIF-4M	3.30	1.38	1.50	0.68	0.43	0.37	1/2"	1/2"	SKP4	EKP4		
PIF-6	3.30	1.38	1.50	1.38	0.43	0.37	3/4"	3/4"	SKP4	EKP4		
PIF-6M	3.30	1.38	1.50	0.68	0.43	0.37	3/4"	3/4"	SKP4	EKP4		

