



## SSST SERIES PNEUMATIC ACTUATED TRI-CLAMP BUTTERFLY VALVES




### FEATURES:

#### Actuator

- 90 PSI to Operate
- Extruded Aluminum Body
- Viton® O-Rings Seals
- -4°F to 185°F

#### Valve

- 316 Stainless Steel Construction, Surface Finish Meets All 3-A FDA & USDA Standards and Requirements
- Polished Disc Ensures Smooth Flow & Less Buildup
- Silicone Seats Std., EPDM, Viton and White Viton C/F
- 110PSI @ 200°F
- Manual Valve w/ Position Locking Handle Available

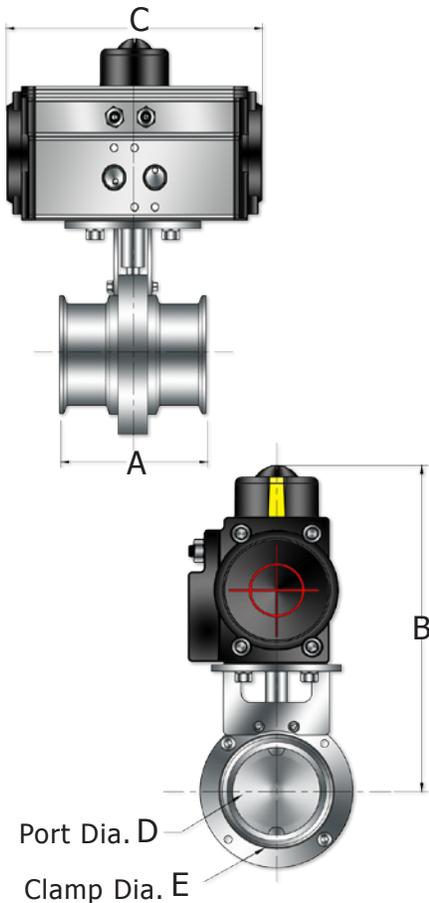

### DOUBLE ACTING DIMENSIONS:

Part No.	Size NPT	Actuator	A	B	C	D	E
PD/SSST-1	1"	DA52	3.50	6.56	5.88	0.87	1.99
PD/SSST-1.5	1 1/2"	DA52	3.50	6.67	5.88	1.37	1.99
PD/SSST-2	2"	DA52	3.75	7.06	5.88	1.87	2.52
PD/SSST-2.5	2-1/2"	DA63	3.81	7.91	6.61	2.37	3.05
PD/SSST-3	3"	DA63	4.06	8.05	6.61	2.84	3.58
PD/SSST-4	4"	DA63	4.78	8.74	6.61	3.84	4.68
PD/SSST-6	6"	DA100	6.00	10.12	10.83	4.84	6.50

- \* Option
- = Fail open
- = Fail Close

### SPRING RETURN DIMENSIONS:

Part No.	Size NPT	Actuator	A	B	C	D	E
P*/SSST-1	1"	SR63	3.50	7.21	6.61	0.87	1.99
P*/SSST-1.5	1 1/2"	SR75	3.50	7.79	7.32	1.37	1.99
P*/SSST-2	2"	SR75	3.75	8.18	7.32	1.87	2.52
P*/SSST-2.5	2-1/2"	SR75	3.81	8.38	7.32	2.37	3.05
P*/SSST-3	3"	SR85	4.06	8.69	9.47	4.17	3.58
P*/SSST-4	4"	SR85	4.78	9.38	9.47	4.17	4.68
P*/SSST-6	6"	SR140	6.00	12.45	17.13	6.46	6.50