



S2S Series Electric Actuated Valves




Features:

Actuator


- VO Self Extinguishing Class Techno-Polymer
- Metal Available on request
- All Actuators IP67 (VB015 IP65)
- Heater Thermostat Standard
- Manual Override Standard
- Two Auxiliary Limit Switches Standard
- Battery Backup or 4-20mA Positioner Optional

Valve

- Stainless Steel
- Standard Port 2-Piece Ball Valve
- 29"Hg-2000PSI WOG
- RTFE Seats and PTE Seals
- Temperature -20°F to 450°F



Manual
Override

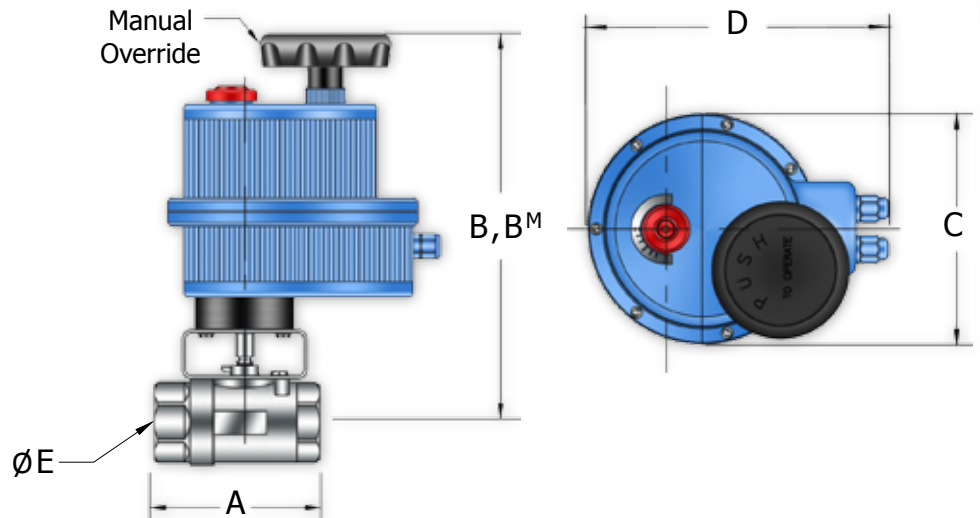

*** Actuator Voltage

115V = 115VAC

240V = 240VAC

012D = 12VDC

024D = 24VDC

B^M = Optional Metal Actuator

Dimensions:

Part No.	Size	Actuator		A	B	C	D	ØE	B ^M	Bracket Kit
		Standard	Optional							
E***/S2S-2	1/4"	VB015	VB030M	2.00	8.64	4.84	6.41	0.39	11.10	MK2051
E***/S2S-3	3/8"	VB015	VB030M	2.00	8.64	4.84	6.41	0.39	11.10	MK2051
E***/S2S-4	1/2"	VB015	VB030M	2.40	9.07	4.84	6.41	0.59	11.53	MK2051
E***/S2S-6	3/4"	VB015	VB030M	2.67	9.34	4.84	6.41	0.78	11.79	MK2052
E***/S2S-8	1"	VB030	VB030M	3.26	10.90	6.18	7.48	0.98	11.54	MK2052
E***/S2S-10	1-1/4"	VB030	VB030M	3.54	11.02	6.18	7.48	1.25	11.65	MK2059
E***/S2S-12	1-1/2"	VB030	VB030M	4.09	11.49	7.28	8.43	1.49	12.12	MK2060
E***/S2S-16	2"	VB060	VB060M	4.60	12.73	7.28	8.43	1.96	12.99	MK2064