





STC TT & TL Series Electric Actuated Valves



- ### Actuator Features:
- VO Self Extinguishing Class Techno-Polymer
 - All Actuators IP67 (VB015 IP65)
 - Heater Thermostat Standard
 - Manual Override Standard
 - Two Auxiliary Limit Switches Standard
 - Battery Backup or 4-20mA Positioner Optional
- ### Valve
- Stainless Steel 3-way
 - Sanitary Tri-Clamp Ball Valve
 - ISO 5211 Mounting Pad
 - Cavity Filled Teflon Seats Standard (Non-Cavity Filled Seats Optional)
 - Meets FDA, USDA, and 3A Requirements (Cavity Filled Only)

*** Actuator Voltage
115V = 115VAC
240V = 240VAC
012D = 12VDC
024D = 24VDC
 B^M = Optional Metal Actuator

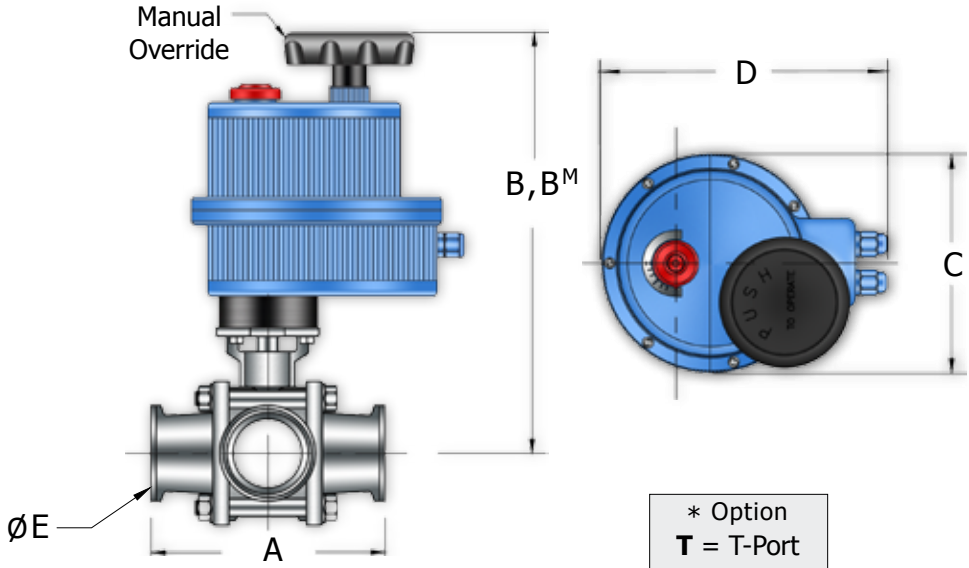

* Option
T = T-Port
L = L-Port

Dimensions:

Part No.	Size	Actuator		A	B	C	D	E	ØE	B ^M
		Standard	Optional							
E***/STC-8T*	1"	VB030	VB030M	4.50	10.16	7.48	6.18	0.87	0.87	10.16
E***/STC-12T*	1-1/2"	VB060	VB060M	5.50	11.35	8.43	7.28	1.37	1.37	11.01
E***/STC-16T*	2"	VB060	VB060M	6.25	11.72	6.94	7.82	1.87	1.87	11.38
E***/STC-24T*	3"	VB110	VB110M	9.00	13.91	9.33	8.31	2.88	2.88	14.42
E***/STC-32T*	4"	VB190	VB190M	9.50	14.35	9.33	8.31	3.84	3.84	15.01