




WFF 150 Series Electric Actuated Valves



- ## Features:
- Actuator**
- Aluminum Alloy Enclosure w/Poly Powder Coating
 - All Actuators IP67
 - Heater Thermostat Standard
 - Manual Override Standard
 - Two Auxiliary Limit Switches Standard
 - Battery Backup or 4-20mA Positioner Optional
- Valve**
- Full Port Wafer ANSI Class 150
 - Class 150 29Hg – 285psi, Cold Non-Shock
 - Stainless Steel Ball and Stem
 - Blow-Out Proof Stem with Adjustable Stem Packing
 - Temperature -4°F to 366°F
 -




*** Option Actuator Voltage

115V = 115VAC
240V = 240VAC
012D = 12VDC
024D = 24VDC

B^M = Metal Actuator Std.
 B = Optional ABS Actuator

* Option
 S = Stainless
 C = Carbon

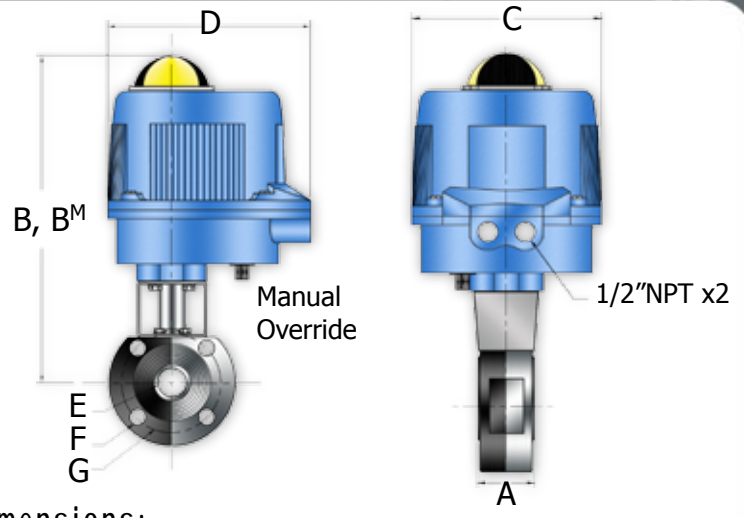

Dimensions:

Part No.	Size	Actuator		A	B ^M	B	C	D	E	F	G	Bracket Kit
		Standard	Optional									
E***M/*WFF150-4	1/2"	VB015M	VB015	1.37	11.27	8.81	4.84	6.41	0.59	4x0.50	3.50	RI3780
E***M/*WFF150-6	3/4"	VB015M	VB015	1.57	11.44	8.98	4.84	6.41	0.78	4x0.50	3.88	RI3013
E***M/*WFF150-8	1"	VB030M	VB030	1.81	11.67	11.04	6.18	7.48	0.98	4x0.50	4.25	RI3001
E***M/*WFF150-10	1-1/4"	VB030M	VB030	2.12	11.91	11.28	6.18	7.48	1.26	4x0.50	4.62	RI3008
E***M/*WFF150-12	1-1/2"	VB060M	VB060	2.50	13.22	12.96	7.28	8.43	1.57	4x0.50	5.00	RI3002
E***M/*WFF150-16	2"	VB060M	VB060	3.22	12.66	12.40	7.28	8.43	1.97	4x0.63	6.00	RI3002
E***M/*WFF150-20	2-1/2"	VB110M	VB110	4.05	15.15	14.64	8.31	9.33	2.52	4x0.63	7.00	RI3003
E***M/*WFF150-24	3"	VB110M	VB110	4.80	15.45	14.94	8.31	9.33	2.99	4x0.63	7.50	RI3003
E***M/*WFF150-32	4"	VB190M	VB190	5.98	16.24	15.63	8.74	9.72	3.74	8x0.63	9.00	RI3004
E***M/*WFF150-40	5"	VB190M	VB190	7.71	17.92	17.31	8.74	9.72	4.92	8x0.75	10.00	RI3004
E***M/*WFF150-64	6"	VB350M	VB350	9.13	18.91	18.30	8.74	9.72	5.91	8x0.75	11.00	RI3006