




WFF 300 Series Electric Actuated Valves



- ## Features:
- Actuator**
 - Aluminum Alloy Enclosure w/Poly Powder Coating
 - All Actuators IP67
 - Heater Thermostat Standard
 - Manual Override Standard
 - Two Auxiliary Limit Switches Standard
 - Battery Backup or 4-20mA Positioner Optional
 - Valve**
 - Full Port Wafer ANSI Class 300
 - Class 300 29Hg - 740psi, Cold Non-Shock
 - Stainless Steel Ball and Stem
 - Blow-Out Proof Stem with Adjustable Stem Packing
 - Temperature -4°F to 366°F
 - Available with V-Ball Option C/F




*** Option Actuator Voltage

115V = 115VAC
240V = 240VAC
012D = 12VDC
024D = 24VDC

B^M = Metal Actuator Std.
 B = Optional ABS Actuator

* Option
 S = Stainless
 C = Carbon

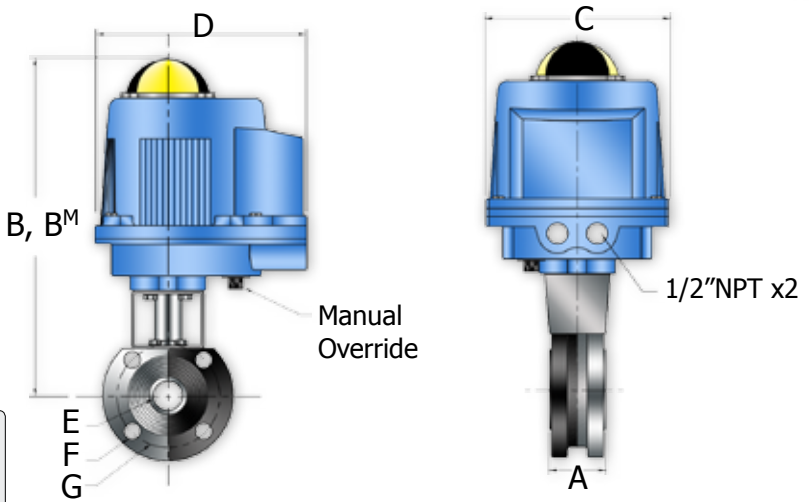

Dimensions:

Part No.	Size	Actuator		A	B ^M	B	C	D	E	F	G	Bracket Kit
		Standard	Optional									
E***M/*WFF300-4	1/2"	VB030M	VB030	1.38	11.43	10.80	6.18	7.48	0.59	4x0.50	3.75	RI3780
E***M/*WFF300-6	3/4"	VB060M	VB060	1.57	12.38	12.12	7.28	8.43	0.78	4x0.63	4.62	RI3013
E***M/*WFF300-8	1"	VB060M	VB060	1.81	12.60	12.34	7.28	8.43	0.98	4x0.63	4.88	RI3001
E***M/*WFF300-10	1-1/4"	VB060M	VB060	2.12	12.60	12.34	7.28	8.43	1.26	4x0.63	5.25	RI3008
E***M/*WFF300-12	1-1/2"	VB110M	VB110	2.50	14.32	13.81	8.31	9.33	1.57	4x0.75	6.12	RI3002
E***M/*WFF300-16	2"	VB110M	VB110	3.22	14.85	14.34	8.31	9.33	1.97	8x0.63	6.50	RI3002
E***M/*WFF300-20	2-1/2"	VB270M	VB270	4.05	15.43	14.82	8.74	9.72	2.52	8x0.75	7.50	RI3003
E***M/*WFF300-24	3"	VB270M	VB270	4.80	15.90	15.29	8.74	9.72	2.99	8x0.75	8.25	RI3003
E***M/*WFF300-32	4"	VB350M	VB350	5.98	17.46	16.85	8.74	9.72	3.74	8x0.75	10.00	RI3004