


NCA and NCVR SERIES RELIEF VALVES

ALL SPECIFICATIONS AND DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE

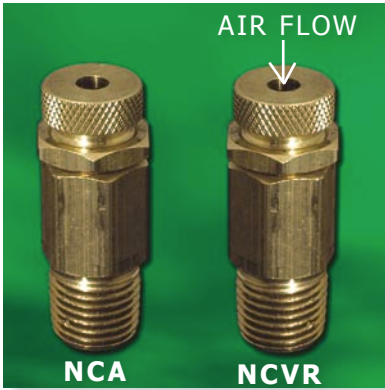

NCA2 & NCA3 SERIES

- Brass Body
- Stainless Steel Spring
- Proportional Relief Valve
- Stainless Steel Ball & Poppet (NCA2)
- Nylon Poppet With Nitrile Seals (NCA3)
- Unfired Pressure Vessel
- Temperature -65°F to 250°F

NPT SIZE	PART#	Pressure Range	HEX
1/4"	NCA2-20	0-20 PSI	5/8"
1/4"	NCA2-60	20-60 PSI	5/8"
1/4"	NCA2-125	50-125 PSI	5/8"
1/4"	NCA2-200	100-200 PSI	5/8"
3/8"	NCA3-20	0-20 PSI	3/4"

NCVR SERIES

- Brass Body
- Stainless Steel Spring
- Nylon Poppet With Nitrile Seals
- Proportional Relief Valve
- Unfired Pressure Vessel
- Temperature -65°F to 250°F

NPT SIZE	PART#	Max. Vacuum Pump Size	HEX
1/4"	NCVR-2	1/4 HP	9/16"
3/8"	NCVR-3	1 HP	1-1/16"
3/4"	NCVR-6	3 HP	1-1/16"

NCHL2 SERIES RELIEF VALVES



NCHL2 SERIES

- Machined Brass Body, Poppet & Sleeve
- 302 Stainless Steel Spring
- Viton Seal, Suffix "V" Standard
- Unfired Pressure Vessel
- Temperature 0°F to 350°F

NPT SIZE	PART#	HEX
1/4"	NCHL2-*	5/8"

* Pressure Settings Available From 5 to 75 PSI in 5 PSI Increments

NCM1 & NCM2 SERIES RELIEF VALVES



NCM1 & NCM2 SERIES

- Brass Body
- Stainless Steel Spring
- Silicon Seal, Standard
- Unfired Pressure Vessel
- Temperature -65°F to 250°F

NPT SIZE	PART#	HEX
1/8"	NCM1-*	9/16"
1/4"	NCM2-*	9/16"

* Pressure Settings Available From 80 to 225 PSI in 5 PSI Increments

CVM1 & CVM2 SERIES RELIEF VALVES



CVM1 & CVM2 SERIES

- Brass Body
- Stainless Steel Spring
- Silicon Seal, Standard
- Viton Seal, Suffix "V" (Optional)
- ASME, NB, UV & CRN# 03378.0-9
- Unfired Pressure Vessel
- Temperature -65°F to 250°F

NPT SIZE	PART#	HEX
1/8"	CVM1-*	9/16"
1/4"	CVM2-*	9/16"

* Pressure Settings Available From 80 to 225 PSI in 5 PSI Increments

