



SCM and SSCM Series Speed Control Muffler

Features:

SCM Series:


- Brass Construction
- 40 Micron Sintered Bronze Element
- 300 PSIG Maximum Working Pressure
- Temperature 35°F to 300°F

SSCM Series:

- 303 Stainless Steel Body
- 70 Micron Sintered 316 S.S. Element
- 300 PSIG Maximum Working Pressure
- Temperature 35°F to 392°F



SCM

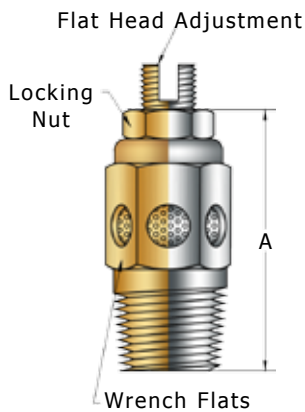

SCM-1	0 to 30	SCFM
SCM-2	0 to 40	SCFM
SCM-3	0 to 62	SCFM
SCM-4	0 to 103	SCFM
SCM-6	0 to 110	SCFM
SCM-8	0 to 140	SCFM



SSCM

Dimensions:

Part	NPT Size	A	Height Full Open	Wrench Flats	Body	Element
-	SCM-1	1/8"	1.31	1.5	1/2"	Brass Fitting 40 Micron Sintered Bronze
SCM-1-H*	SCM-2	1/4"/1/8"*	1.56	1.8	6/16"	
SCM-2-H*	SCM-3	3/8"/1/4"*	1.63	2	11/16"	
SCM-3-H*	SCM-4	1/2"/3/8"*	2.00	2.4	7/8"	
SCM-4-H*	SCM-6	3/4"/1/2"*	2.38	2.9	1-1/16"	
-	SCM-8	1"	2.50	3.1	1-5/16"	303 Grade Stainless Steel 316 Stainless Steel, 70 Micron
-	SSCM-1	1/8"	1.53	1.5	1/2"	
-	SSCM-2	1/4"	1.92	1.8	9/16"	
-	SSCM-3	3/8"	2.06	2	11/16"	
-	SSCM-4	1/2"	2.39	2.4	7/8"	
-	SSCM-6	3/4"	2.84	2.9	1-1/16"	
-	SSCM-8	1"	3.06	3.1	1-3/8"	

* High Flow

