



DIMENSIONAL DATA						
PART #	NPT	A	B	C	ØD	Cv
BHM-2	1/4"	2.06	1.75	3.87	0.37	8
BHM-3	3/8"	2.06	1.75	3.87	0.37	7
BHM-4	1/2"	2.25	1.75	3.87	0.50	15
BHM-6	3/4"	3.00	2.12	4.87	0.68	30
BHM-8	1"	3.37	2.25	4.87	0.87	43
BHM-10	1 1/4"	4.00	2.62	5.50	1.00	48
BHM-12	1 1/2"	4.37	3.06	8.00	1.25	84
BHM-16	2"	4.68	3.25	8.00	1.50	108
BHM-20	2 1/2"	6.25	3.72	8.00	2.00	190
BHM-24	3"	6.75	4.12	8.00	2.50	370
BHM-32	4"	7.37	5.25	9.94	3.12	670

- NOTES:
- 600 PSIG W.O.G.
 - 150 PSIG SATURATED STEAM
 - RPTFE SEATS
 - PTFE SEALS, (4" SIZE USES TFM)
 - -35°F TO 400°F

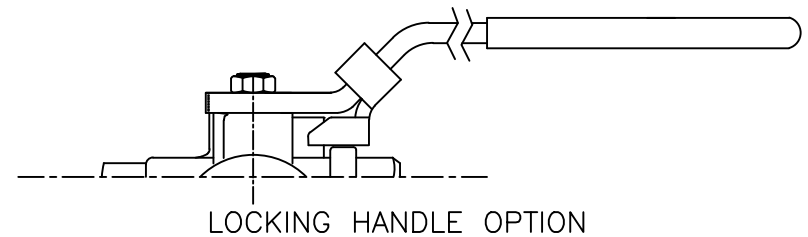

NOTE: LOCKING HANDLE OPTION AVAILABLE
 LOCKING HANDLE ORIENTATED 180° FROM NON-LOCKING
 HANDLE. LOCKING HANDLE PART NUMBER DENOTION: BHM-##LL

THIS DOCUMENT IS PROPERTY OF UNIVERSAL COMPONENTS, INC.
 ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT IS
 EXPRESSLY PROHIBITED UNLESS OTHERWISE AGREED UPON IN
 WRITING.
 ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

			
DRAWING NAME: 2-WAY 600 PSI BRONZE BALL VALVE			
MATERIAL:	A	DRAWING NUMBER: BHM-SERIES	REV. 1
SCALE: N.T.S.	NAME: MCH	DATE: 2-28-17	