


DIMENSIONAL DATA							
PART#	NPT	A	B	C	D	E	Cv
BHM-2T	1/4"	2.25	1.80	1.09	3.88	0.50	2.3
BHM-3T	3/8"	2.27	1.80	1.12	3.88	0.50	4.5
BHM-4T	1/2"	2.75	1.75	1.10	3.88	0.50	5.4
BHM-6T	3/4"	3.00	2.12	1.50	4.87	0.68	12
BHM-8T	1"	3.20	2.20	1.59	4.87	0.87	14
BHM-10T	1 1/4"	3.98	2.69	1.99	5.50	1.00	21
BHM-12T	1 1/2"	4.40	2.87	2.21	5.50	1.25	34
BHM-16T	2"	4.69	3.00	2.34	5.50	1.50	47


- NOTES:
- 400 PSIG W.O.G.
 - BLOWOUT PROOF STEM
 - ADJUSTABLE PACKING
 - -35°F TO 400°F

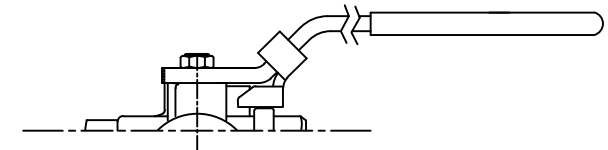

LOCKING HANDLE OPTION

NOTE: LOCKING HANDLE OPTION AVAILABLE
 LOCKING HANDLE ORIENTATED 180° FROM NON-LOCKING
 HANDLE. LOCKING HANDLE PART NUMBER DENOTION: BHM-##LL

BHM-T VALVES ARE IN AN L-PORT
 CONFIGURATION. FLOW WILL BE AS DEPICTED
 BELOW DEPENDING ON LEVER POSITION

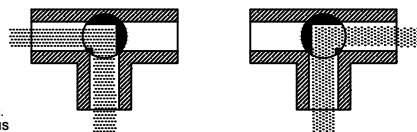

MEDIA FLOW PATH

THIS DOCUMENT IS PROPERTY OF UNIVERSAL COMPONENTS, INC.
 ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT IS
 EXPRESSLY PROHIBITED UNLESS OTHERWISE AGREED UPON IN WRITING.
 ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



DRAWING NAME:

BRONZE 3-WAY 400 PSI L-PORT VALVE

MATERIAL:

A

DRAWING NUMBER:
 BHM-T SERIES

REV.
 1

SCALE: N.T.S.

NAME: MCH

DATE: 2-28-17