
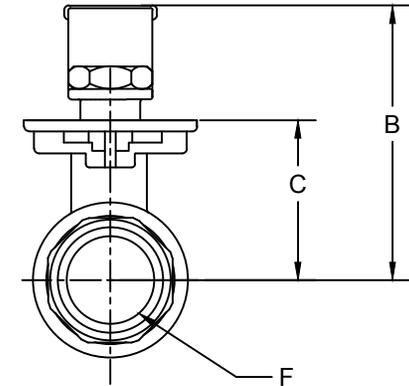
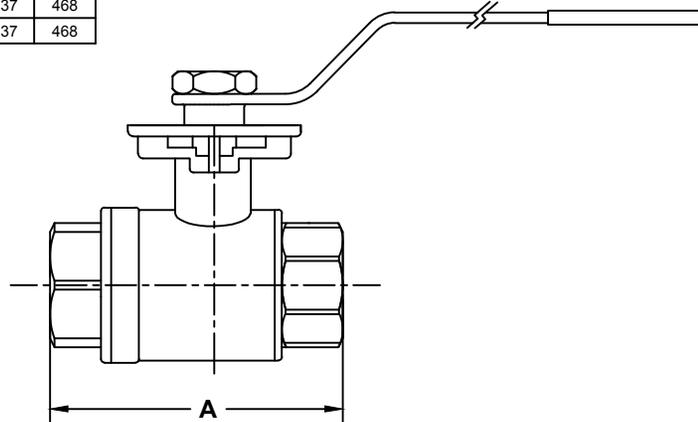


ASSEMBLY DIMENSIONS- CARBON STEEL (C2F3M)							
PART #	A	B	C	D	E	F	TORQUE (IN LBS)
C2F3M-2	2.18	1.96	1.43	F03/F04	1/4 NPT	0.38	101
C2F3M-3	2.18	1.96	1.43	F03/F04	3/8 NPT	0.38	104
C2F3M-4	2.59	2.08	1.56	F03/F04	1/2 NPT	0.50	130
C2F3M-6	3.11	2.67	2.08	F03/F04	3/4 NPT	0.69	156
C2F3M-8	3.66	3.11	2.35	F04/F05	1 NPT	0.87	208
C2F3M-10	3.93	3.28	2.52	F04/F05	1 1/4 NPT	1.14	390
C2F3M-12	4.33	3.93	2.99	F04/F05	1 1/2 NPT	1.37	468
C2S3M-16	5.15	4.21	3.27	F04/F05	2 NPT	1.37	468

ASSEMBLY DIMENSIONS- STAINLESS STEEL (S2F3M)							
PART #	A	B	C	D	E	F	TORQUE (IN LBS)
S2F3M-2	2.18	1.96	1.43	F03/F04	1/4 NPT	0.38	101
S2F3M-3	2.18	1.96	1.43	F03/F04	3/8 NPT	0.38	104
S2F3M-4	2.59	2.08	1.56	F03/F04	1/2 NPT	0.50	130
S2F3M-6	3.11	2.67	2.08	F03/F04	3/4 NPT	0.69	156
S2F3M-8	3.66	3.11	2.35	F04/F05	1 NPT	0.87	208
S2F3M-10	3.93	3.28	2.52	F04/F05	1 1/4 NPT	1.14	390
S2F3M-12	4.33	3.93	2.99	F04/F05	1 1/2 NPT	1.37	468
S2S3M-16	5.15	4.21	3.27	F04/F05	2 NPT	1.37	468

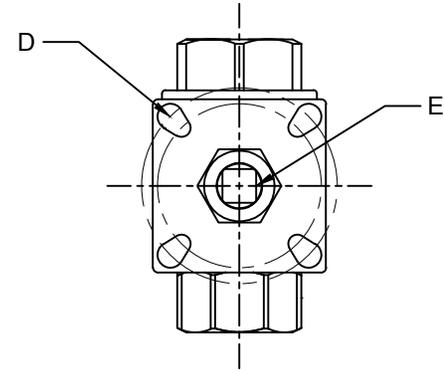

VALVE NOTES:

- CARBON STEEL OR STAINLESS STEEL (SEE ORDERING MATRIX)
- 3000 PSI WORKING PRESSURE
- BLOW-OUT PROOF STEM
- VITON STEM O-RING
- TEMPERATURE: -20°F to 185° F
- 2" NPT SIZE IS STANDARD PORT
ALL OTHERS FULL PORT
- MOUNTING PAD FOR ACTUATION

REFER TO CATALOG FOR FURTHER ORDERING INFORMATION

THIS DOCUMENT IS PROPERTY OF UNIVERSAL COMPONENTS, INC.
ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT IS
EXPRESSLY PROHIBITED UNLESS OTHERWISE AGREED UPON IN WRITING.
ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

			
DRAWING NAME: MANUAL 2- WAY CARBON STEEL / STAINLESS C2F3M-S2F3M Series			
MATERIAL:	A	DRAWING NUMBER: C2F3M-S2F3M SERIES	REV. 3
SCALE: N.T.S.	NAME: MCH	DATE: 2-05-2020	