


### CFM-TL SERIES

PART #	THREAD SIZE	A	B	C	D	PSI
CFM-2TL	1/4"	2.72	1.20	4.21	0.24	5880
CFM-S4TL	7/16"-20					
CFM-3TL	3/8"	2.82	1.29	4.21	0.39	5880
CFM-S6TL	9/16"-18					
CFM-4TL	1/2"	3.62	1.31	4.21	0.51	5145
CFM-S8TL	3/4"-16					
CFM-6TL	3/4"	3.82	1.91	6.50	0.78	5145
CFM-S12TL	1 1/16"-12					
CFM-8TL	1"	4.45	1.95	6.50	0.94	5145
CFM-S16TL	1 5/16"-12					
CFM-10TL	1 1/4"	4.53	2.60	6.50	1.18	5145
CFM-S20TL	1 5/8"-12					
CFM-12TL	1 1/2"	4.81	2.73	6.50	1.37	5145
CFM-S24TL	1 7/8"-12					
CFM-16TL	2"	5.53	3.15	8.50	1.73	5145
CFM-S32TL	2 1/2"-12					

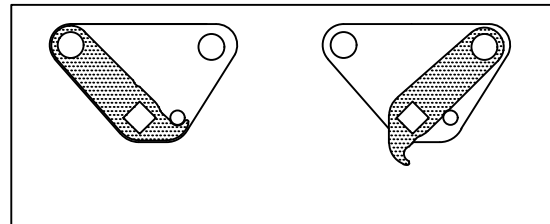

LOCKING PLATE AVAILABLE.  
ADD 'LP' TO PART NUMBER

#### CFM-TL - SERIES NOTES:

- HIGH PRESSURE (SEE CHART)
- DELRIN SEAT
- VITON O-RING
- BLOW-OUT PROOF STEM
- 150 PSIG Saturated Steam
- TEMP -20°F to 215°F

LOCKING PLATE AVAILABLE. ADD 'LP' TO PART NUMBER



DRAWING NAME:

**CARBON STEEL 3-WAY L-PORT  
HIGH PRESSURE VALVES**

MATERIAL:

**A**

DRAWING NUMBER:

CFM-TL-SERIES-DIMENSIONAL

REV.

**2**

SCALE: N.T.S.

NAME: MCH

DATE:

8-3-21