



ASSEMBLY DIMENSIONS

PART #	ACTUATOR MODEL #		A	B	C	D	B ^M
	STANDARD	OPTIONAL METAL					
E ^{***} /B2S-2T*	VB015	VB030M	2.64	6.67	4.84	6.41	C/F
E ^{***} /B2S-3T*	VB015	VB030M	2.64	6.67	4.84	6.41	C/F
E ^{***} /B2S-4T*	VB015	VB030M	2.87	6.67	4.84	6.41	C/F
E ^{***} /B2S-6T*	VB015	VB030M	3.19	6.86	4.84	6.41	C/F
E ^{***} /B2S-8T*	VB030	VB030M	3.74	7.38	6.18	7.48	7.64
E ^{***} /B2S-10T*	VB030	VB030M	4.39	7.60	6.18	7.48	7.86
E ^{***} /B2S-12T*	VB030	VB030M	4.86	8.09	6.18	7.48	8.35
E ^{***} /B2S-16T*	VB060	VB060M	5.73	11.36	6.94	8.43	11.62
E ^{***} /B2S-20T*	VB060	VB060M	6.93	11.81	6.94	8.43	12.07
E ^{***} /B2S-24T*	VB060	VB060M	7.08	11.81	6.94	8.43	12.07

REFER TO CATALOG FOR FURTHER ORDERING INFORMATION

E^{***}:
 115V = 115VAC
 240V = 240 VAC
 012D = 12VDC
 024D = 24VDC

T*:
 TT = T-Port
 TL = L-Port
 B^M = OPTIONAL METAL ACTUATOR

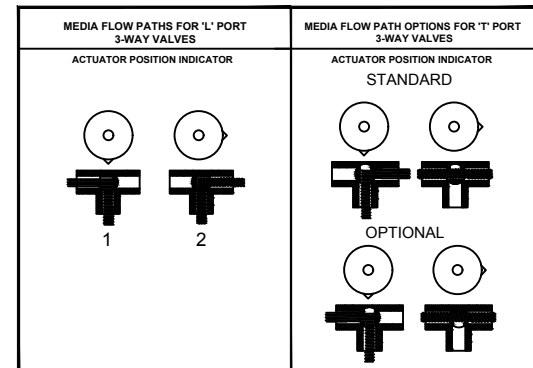

DRAWING NAME:

**ELECTRIC ACTUATED B2S-TT & TL
 NPT BRASS 3-WAY BALL VALVES**

MATERIAL:

A

DRAWING NUMBER:
 ELECTRIC ACTUATED B2S-3-WAY

REV.
2

SCALE: N.T.S.

NAME: MCH

DATE: 2-13-17