


NOTES:

- BODY: ANODIZED 6061-T6
- SPOOL: 6061-T6
- SEALS: BUNA-N
- ARMATURE MOUNT/OVER-RIDE BUTTON: ACETAL PLASTIC
- ARMATURE TUBE: BRASS/STEEL
- RETAINING NUT: ACETAL PLASTIC WITH PLATED STEEL THREADED INSERT
- BODY END PLATE AND SCREWS: PLATED STEEL
- 80-100 PSI OPERATING PRESSURE



MODEL	VOLTAGE	INRUSH
N4S-C1	110 VAC	62mA
N4S-C2	24 VDC	108mA
N4S-C12	12 VDC	204mA
N4S-C22	220 VAC	31mA
N4S-C24	24 VAC	C/F

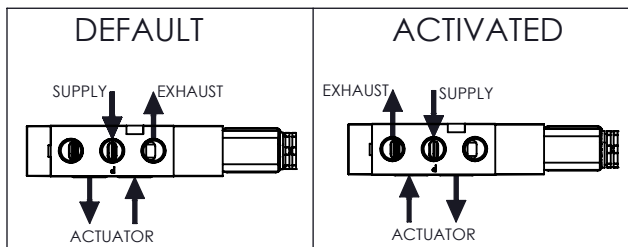

DRAWING NAME:

N4S-C*- SERIES

MATERIAL: --	A	DRAWING NUMBER: N4S-C	REV. 1
SCALE: N.T.S.	NAME: MCH	DATE: 6/3/2024	

THIS DOCUMENT IS PROPERTY OF UNIVERSAL COMPONENTS, INC. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT IS EXPRESSLY PROHIBITED UNLESS OTHERWISE AGREED UPON IN WRITING. *ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.*