


NOTES:

- BODY: ANODIZED 6061-T6
- SPOOL: 6061-T6
- SEALS: BUNA-N
- ARMATURE MOUNT/OVER-RIDE BUTTON: ACETAL PLASTIC
- ARMATURE TUBE: BRASS/STEEL
- RETAINING NUT: ACETAL PLASTIC WITH PLATED STEEL THREADED INSERT
- BODY END PLATE AND SCREWS: PLATED STEEL
- 80-100 PSI OPERATING PRESSURE



MODEL	VOLTAGE	INRUSH
N4S-D1	110 VAC	62mA
N4S-D2	24 VDC	108mA
N4S-D12	12 VDC	204mA
N4S-D22	220 VAC	31mA
N4S-D24	24 VAC	C/F

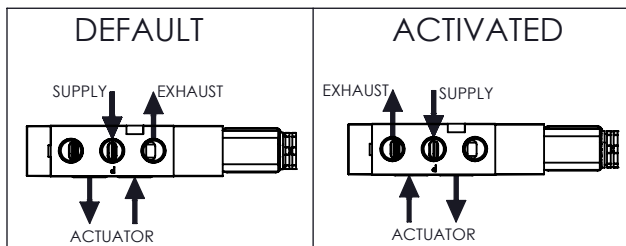

DRAWING NAME:

N4S-D*- SERIES

MATERIAL:

--

A

DRAWING NUMBER:

N4S-D

REV.

1

SCALE: N.T.S.

NAME: MCH

DATE: 6/3/2024

THIS DOCUMENT IS PROPERTY OF UNIVERSAL COMPONENTS, INC. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT IS EXPRESSLY PROHIBITED UNLESS OTHERWISE AGREED UPON IN WRITING. *ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.*