


NB-M & SSNB-M SERIES

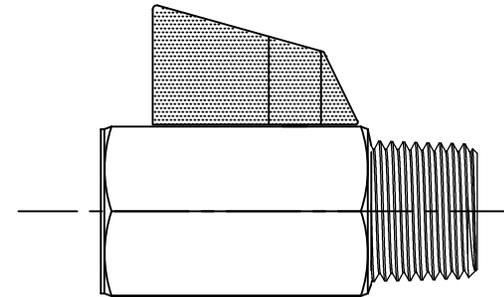

VALVE DIMENSIONS: NB SERIES

PART #	A	B	Cv	E	WEIGHT lbs.	NPT
NB-1	1.61	1.12	5.00	1.60	0.25	1/8"
NB-2	1.69	1.16	5.00	1.60	0.20	1/4"
NB-3	1.69	1.16	3.13	1.78	0.17	3/8"
NB-4	2.16	1.24	6.26	1.98	0.28	1/2"
NB-6	2.36	2.36	8.46	2.22	0.49	3/4"

VALVE DIMENSIONS: NB-M SERIES

PART #	A	B	Cv	E	WEIGHT lbs.	NPT
NB-M1	1.61	1.12	5.00	1.60	0.25	1/8"
NB-M2	1.69	1.16	5.00	1.60	0.20	1/4"
NB-M3	1.69	1.16	3.13	1.78	0.17	3/8"
NB-M4	2.16	1.24	6.26	1.98	0.28	1/2"
NB-M6	2.36	2.36	8.46	2.22	0.49	3/4"

VALVE DIMENSIONS: SSNB SERIES

PART #	A	B	Cv	E	WEIGHT lbs.	NPT
SSNB-2	1.69	1.16	5.00	1.60	0.20	1/4"
SSNB-3	1.69	1.16	3.13	1.78	0.17	3/8"
SSNB-4	2.16	1.24	6.26	1.98	0.28	1/2"

VALVE DIMENSIONS: SSNB-M SERIES

PART #	A	B	Cv	E	WEIGHT lbs.	NPT
SSNB-M2	1.69	1.16	5.00	1.60	0.36	1/4"
SSNB-M3	1.69	1.16	3.13	1.78	0.35	3/8"
SSNB-M4	2.16	1.24	6.26	1.98	0.35	1/2"

VALVE NOTES:

- 450 PSIG W.O.G. / 29" HG
- BLOW OUT PROOF STEM
- PTFE SEATS
- -20°F TO 200°F OPERATING TEMP
- DOUBLE O-RING STEM SEAL
- NICKEL PLATED BRASS BODY WITH PLATED BALL
- 'SS' SERIES IS STAINLESS STEEL BODY/BALL

CONSULT CATALOG FOR FURTHER ORDERING INFORMATION AND OPTIONS



DRAWING NAME:

2-WAY MINI BALL VALVE WITH HANDLE

MATERIAL:

A

DRAWING NUMBER:
NB-SERIES

REV.
1

SCALE: N.T.S.

NAME: MCH

DATE: 1-9-17