


VALVE NOTES:

- 1/4 NPT TO 2" NPT 200 PSI
- 2-1/2 AND 3" ARE 125 PSI
- LOCKING HANDLE
- BLOWOUT PROOF STEM
- RTFE SEATS & SEALS
- TEMP RATING: -4° TO 350°F
- *1/4" to 1" HAVE 10-32 THREADED EXHAUST PORT, 1-1/4" AND UP USE NON-THREADED EXHAUST PORT.

EXHAUST VALVE OPERATION

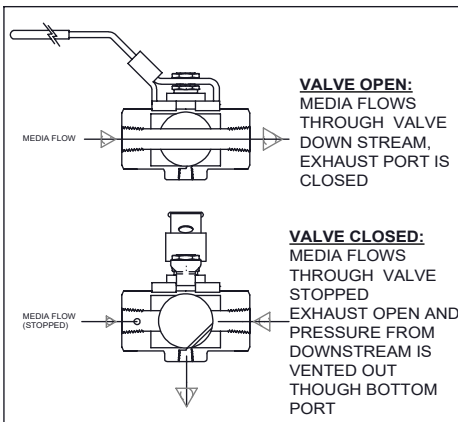

VALVE DIMENSIONS: SEL SERIES

PART #	A	ØB	C	D	NPT	WEIGHT lbs	Cv
SEL-2	1.77	0.31	1.81	3.76	1/4"	1.02	8.1
SEL-3	1.77	0.39	1.81	3.76	3/8"	1.04	14
SEL-4	2.32	0.59	1.93	3.76	1/2"	1.55	26
SEL-6	2.52	0.79	2.18	4.57	3/4"	2.27	51
SEL-8	3.19	0.98	2.62	4.57	1"	3.28	68
SEL-10	3.31	0.94	2.64	4.84	1 1/4"	1.65	41.2
SEL-12	3.54	1.25	3.15	5.94	1 1/2"	1.92	81.5
SEL-16	4.07	1.56	3.40	5.94	2"	2.69	124
SEL-20	6.25	2.00	5.14	8.00	2 1/2"	26.61	510
SEL-24	6.75	2.50	8.10	8.00	3"	43.00	996

THIS DOCUMENT IS PROPERTY OF UNIVERSAL COMPONENTS, INC. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT IS EXPRESSLY PROHIBITED UNLESS OTHERWISE AGREED UPON IN WRITING. *ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.*



DRAWING NAME:
2-WAY BRASS SAFETY EXHAUST VALVE W/LOCKING HANDLE

MATERIAL: --	A	DRAWING NUMBER: SEL-SERIES	REV. 1
SCALE: N.T.S.	NAME: MCH	DATE: 8/4/2023	