

VALVE NOTES:

- ASTM 316 STAINLESS STEEL CONSTRUCTION
- POLISHED DISC ENSURES SMOOTH FLOW AND REDUCED BUILDUP
- SURFACE FINISH MEETS ALL 3-A, FDA AND USDA STANDARDS AND REQUIREMENTS
- SILICONE SEATS STANDARD, EPDM, VITON AND WHITE VITON AVAILABLE
- 110PSI @ 200° F
- ALSO AVAILABLE AS MANUAL VALVE WITH POSITON-LOCKING HANDLE

ACTUATOR NOTES:


- 304 STAINLESS STEEL
- AIR SPRING/AIR AIR ACTUATED OPTION
- NEMA 4 RATING
- SOLENOID AND LIMIT SWITCH ON ELECTRICALLY CONTROLLED UNIT
- NON-MECHANICAL PROXIMITY SWITCH OPTIONAL ON ELECTRIC UNIT
- AIR/ELECTRIC UNIT WITH STAINLESS COVER SHOWN. AIR/AIR UNIT HAS PLASTIC COVER

CONSULT ORDERING MATRIX FOR OPTIONS AND MATERIALS

AIR ACTUATED STAINLESS SSC/P*- TRI-CLAMP BUTTERFLY VALVE				
PART #	A	B	C	E
SSC/P*-CT-1	3.50	10.32	3.50	0.87
SSC/P*-CT-1.5	3.50	10.55	3.50	1.37
SSC/P*-CT-2	3.75	11.13	3.50	1.87
SSC/P*-CT-2.5	3.81	11.52	3.50	2.37
SSC/P*-CT-3	4.06	11.77	3.50	2.84
SSC/P*-CT-4	4.78	12.98	4.00	3.84
SSC/P*-CT-6	6.00	14.60	4.00	5.83

AIR/ELECTRIC CONTROLLED ACTUATED STAINLESS SSC- TRI-CLAMP BUTTERFLY VALVE WITH INTEGRATED SWITCH AND SOLENOID				
PART #	A	B	C	E
E***SSC/P*-CT-1	3.50	11.32	3.50	0.87
E***SSC/P*-CT-1.5	3.50	11.55	3.50	1.37
E***SSC/P*-CT-2	3.75	12.13	3.50	1.87
E***SSC/P*-CT-2.5	3.81	12.52	3.50	2.37
E***SSC/P*-CT-3	4.06	12.77	3.50	2.84
E***SSC/P*-CT-4	4.78	13.98	4.00	3.84
E***SSC/P*-CT-6	6.00	15.60	4.00	5.83

E***: 115V = 115VAC
 240V = 240 VAC
 012D = 12VDC
 024D = 24VDC
 P*: PD: DOUBLE ACTING
 PC: FAILSAFE CLOSE
 PO: FAILSAFE OPEN

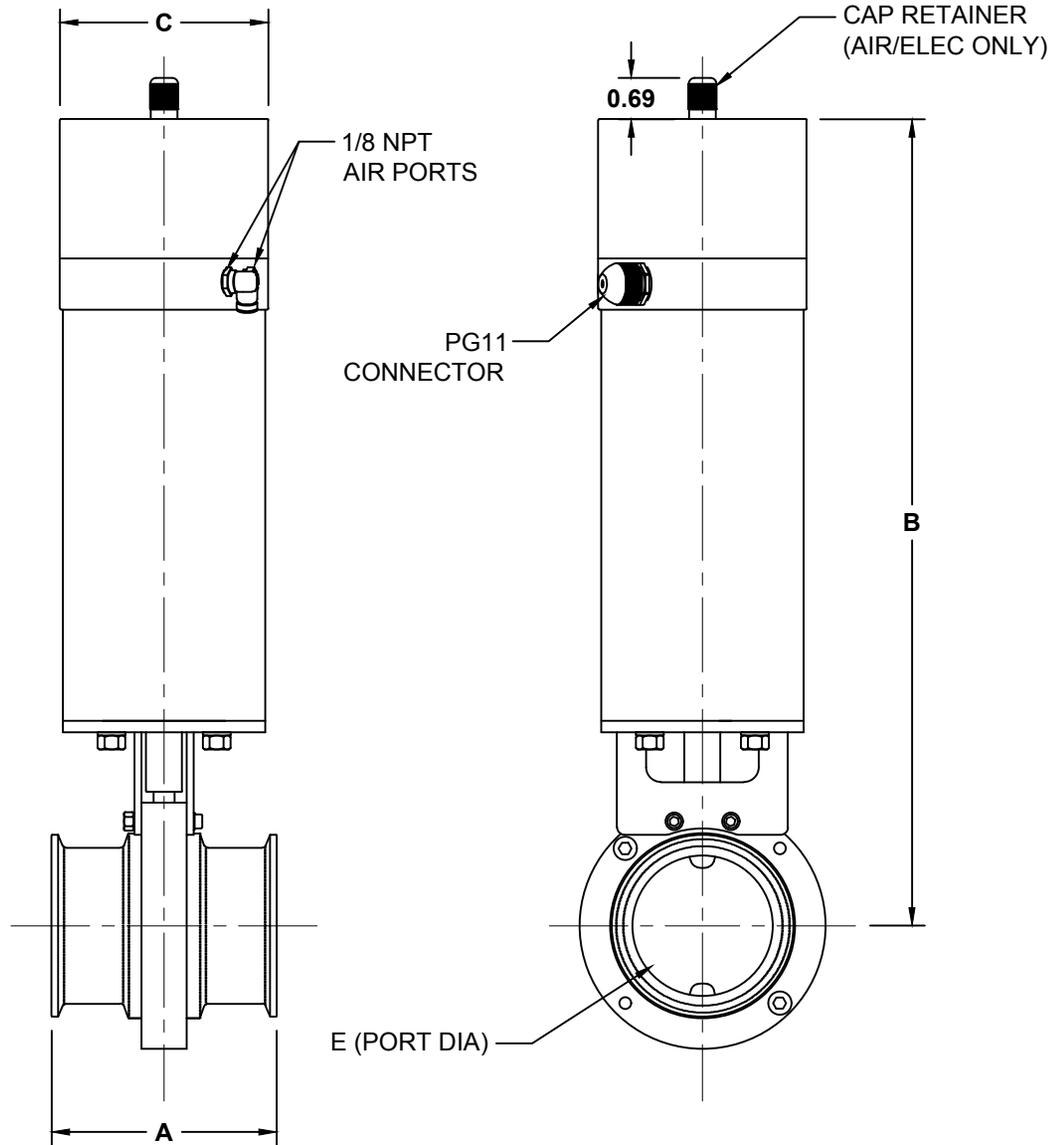

THIS DOCUMENT IS PROPERTY OF UNIVERSAL COMPONENTS, INC. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT IS EXPRESSLY PROHIBITED UNLESS OTHERWISE AGREED UPON IN WRITING. *ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.*

DRAWING NAME: AIR ACTUATED SANITARY TRI-CLAMP BUTTERFLY VALVE W/OPTIONAL FEEDBACK AND ELECTRIC CONTROL			
MATERIAL:	A	DRAWING NUMBER: SSC-SERIES	REV. 1
SCALE: N.T.S.	NAME: MCH	DATE: 12-20-16	