


BOTTOM VIEW



TOP VIEW

| ACTUATOR NOTES | |
|----------------------------|--|
| HOUSING MATERIAL | POWDER COATED CAST ALUMINUM |
| RATINGS/CERTIFICATIONS | IP67, UL NMTR.E303174, ROHS 2011/65/EU, CLASS 1 SHOCK PROTECTION |
| OPERATING TEMP | -4°F TO 131°F |
| TORQUE | 530 IN/LBS (60 Nm) |
| 0° TO 90° CYCLE TIME | 9 SEC. |
| VOLTAGES AVAILABLE: | 12 VAC/DC 2.8-3.8 AMP |
| | 24VAC/DC 1.2-1.8 AMP |
| | 100-240 VAC 0.3-0.6 AMP |
| LIMIT SWITCHES | 2 INTERNAL, STANDARD |
| INTERNAL HEATER | STANDARD FEATURE |
| BATTERY BACKUP FAILSAFE | OPTIONAL |
| 4-20mA FEEDBACK | OPTIONAL |

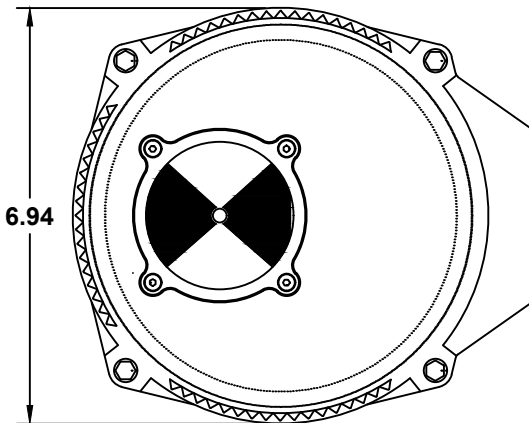

DRAWING NAME:

VB060M-0XX

| | | | |
|---------------|-----------|------------------------------|------------------|
| MATERIAL: | A | DRAWING NUMBER: VB060-0XX | REV. 1 |
| SCALE: N.T.S. | NAME: MCH | DATE: | 7-13-16 |