


DIMENSIONAL DATA							
PART#	NPT	A	B	C	D	EØ	Cv
SHM-2T	¼"	2.32	1.80	3.88	1.18	0.43	2.3
SHM-3T	⅜"	2.32	1.80	3.88	1.18	0.43	4.5
SHM-4T	½"	2.32	1.80	3.88	1.18	0.50	5.4
SHM-6T	¾"	2.97	2.06	4.87	1.50	0.68	12
SHM-8T	1"	3.20	2.15	4.87	1.68	0.87	14
SHM-12T	1 ½"	4.38	3.03	5.43	2.40	1.26	34
SHM-16T	2"	5.43	3.22	5.43	2.81	1.51	47


- NOTES:
- CF8M BODY
  - 316 STAINLESS BALL AND STEM
  - 800 PSIG W.O.G.
  - BLOWOUT PROOF STEM
  - ADJUSTABLE PACKING
  - RPTFE SEATS/PDTE SEALS
  - -35°F TO 400°F
  - MEETS NACE MR0175 (2000) & MR0103 (2012)

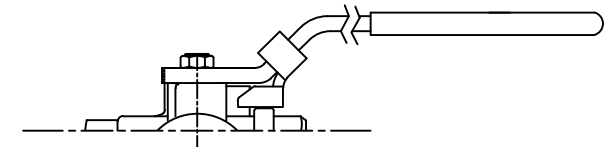

LOCKING HANDLE OPTION

NOTE: LOCKING HANDLE OPTION AVAILABLE  
 LOCKING HANDLE ORIENTATED 180° FROM NON-LOCKING HANDLE. LOCKING HANDLE PART NUMBER DENOTION: SHM-##LL

SHM-T VALVES ARE IN AN L-PORT CONFIGURATION. FLOW WILL BE AS DEPICTED BELOW DEPENDING ON LEVER POSITION

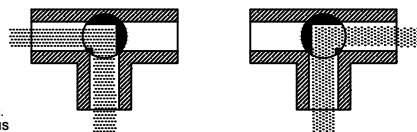

MEDIA FLOW PATH

THIS DOCUMENT IS PROPERTY OF UNIVERSAL COMPONENTS, INC. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT IS EXPRESSLY PROHIBITED UNLESS OTHERWISE AGREED UPON IN WRITING. \*ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.\*



DRAWING NAME:  
**STAINLESS STEEL 3-WAY 800 PSI L-PORT VALVE**

MATERIAL:	<b>A</b>	DRAWING NUMBER: SHM-T SERIES	REV. <b>1</b>
SCALE: N.T.S.	NAME: MCH	DATE: 3-1-17	